

☆. DMX 512 Control:

Channels	Value	Function
CH1	0-255	Total dimming
CH2	0-255	Strobe from slow to fast
CH3	0-50	DMX10CH model
	51-100	Color jump change
	101-150	Color gradient change
	151-200	Color pulse change
	201-255	Sound control
CH4	0-255	Function speed from slow to fast
CH5	0-255	Red from dark to brightness
CH6	0-255	Green from dark to brightness
CH7	0-255	Blue from dark to brightness
CH8	0-255	White from dark to brightness
CH9	0-255	Amber color from dark to brightness
CH10	0-255	UV color from dark to brightness

☆. Product Specification

- Source: 12\*12W RGBAWUV 6in1 LEDs
- Beam Angle: 40 degree
- Channel: 10CH
- Sound control, build-in program, master-slave, DMX mode;
- With strobe effect, program choice color, color changing;
- 256 level mixing effect ,0-100% linear dimming;
- Camera video real without flashing, colour more gorgeous .

# LED DIGITAL PAR LIGHT

## 12\*12W RGBAWUV 6IN1

### MANUAL



Thank you for purchasing the 12\*12W RGBWUV 6in1 LED Par Light by us. Every LED Par Light has been well tested and has been shipped in perfect operating condition. When receiving our products carefully check the shipping carton for damage that might have happened during transport. In case of damage inspect the fixture for any damage or missing accessories necessary to operate. If parts are missing or the fixture has been damaged please report this to us.

### ☆. Introduction

The LED 12\*12W RGBWUV LED Par Light is part of a wider range of DMX intelligent LED PAR CANS. This LED Par Light is compact and light weight and very easy to use. Ideal for any rental job or installation. The unit can be controlled by any DMX console or in stand alone mode.

### ☆. Warning!

To prevent or reduce the risk of electrical shock or fire, do not expose this unit to water, it is only IP65. Please read this user manual carefully to familiarize yourself with the basic operations of this unit.


### ☆. Safety precautions

- ◎ Do not expose this unit to water, it is only with IP65 waterproof rate.
- ◎ Before plugging to power be sure the local power outlet matches with the required voltage of the unit
- ◎ Do not remove the cover under any circumstances in case you are not qualified to do so.
- ◎ Never connect to power when the cover is removed.
- ◎ Never use this unit if it becomes damaged.
- ◎ Never connect this unit to any kind of dimmer and/or power pack.
- ◎ If the unit will not be used for a long time, disconnect it from the power supply.
- ◎ Always mount this unit safely and stably, and make sure the area will have proper ventilation.  
Take care this unit will not be mounted in an area close to heat sources such as lighting fixtures, amplifiers, heat registers, stoves and radiators.
- ◎ Always contact us in case you have any doubts.

### ☆. General instructions

First familiarize yourself with the basic operation principles of this unit by reading the attached user manual carefully. These instructions contain important safety information regarding the use and maintenance of this unit.

### ☆. XLR Wiring

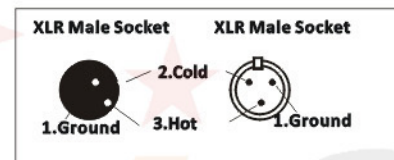

XLR Pin Configuration
Pan1=Ground
Pan2=Data Compliment(negative)
Pan3=Data True(positive)

### ☆. Display Panel Operation



After start up FN into the main menu, according to press UP or DOWN select submenu, then press ENTER to determine



A001-512	⇒	10CH mode
D001-512	⇒	6CH mode
CC01-CC99	⇒	Seven color jumping
EE00-99	⇒	Seven color gradient change
FF00-99	⇒	Seven color combination change
bEbE	⇒	Sound control
r000-255	⇒	Red color
G000-255	⇒	Green color
b000-255	⇒	Blue color
W000-255	⇒	White color
Y000-255	⇒	Amber color
P000-255	⇒	UV color